

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 August 2001 (23.08.2001)


PCT

(10) International Publication Number  
**WO 01/61692 A1**

- (51) International Patent Classification?: **G11B 11/00** (74) Agent: MCCALLUM, Graeme, David; Lloyd Wise, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).
- (21) International Application Number: **PCT/SG00/00029** (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 21 February 2000 (21.02.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **TREK TECHNOLOGY (SINGAPORE) PTE LTD [SG/SG]**; 30 Loyang Way #07-13/14/15, Loyang Industrial Estate, Singapore 508769 (SG).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **CHENG, Chong, Seng [SG/SG]**; 129 Loyang Rise, Singapore 507472 (SG). Published: — *with international search report*

[Continued on next page]

(54) Title: A PORTABLE DATA STORAGE DEVICE

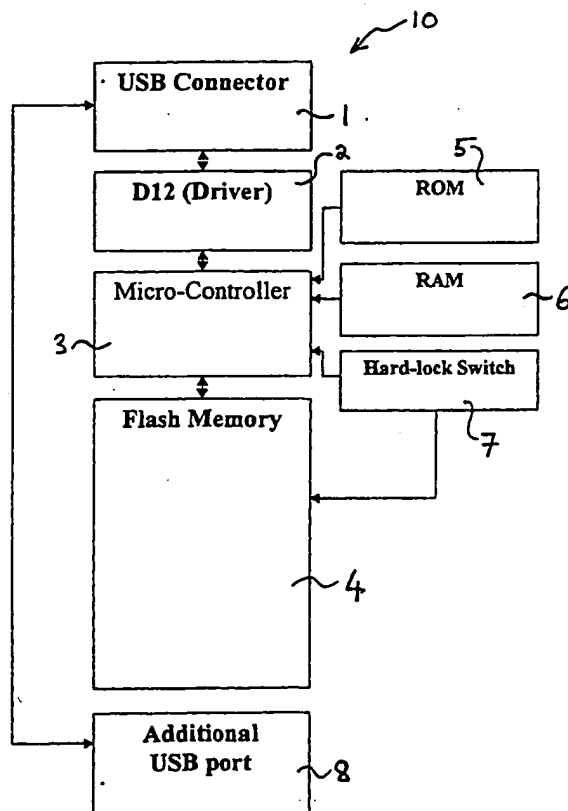

(57) Abstract: A portable data storage device (10) includes a universal serial bus (USB) coupling device (1) and an interface device (2) is coupled to the USB coupling device (1). The portable data storage device (10) also includes a memory control device (3) and a non-volatile solid-state memory device (4). The memory control device (3) is coupled between the interface device (2) and the memory device (4) to control the flow of data from the memory device (4) to the USB coupling device (1).

WO 01/61692 A1

BEST AVAILABLE COPY



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## A Portable Data Storage Device

The invention relates to a portable data storage device, and in particular, a portable data storage device for a computer.

5

Conventional data storage devices generally fall into two categories. The first category is electronic, solid-state memory devices such as read only memory (ROM) and random access memory (RAM). These memory devices are generally fitted within the computer. They are not intended to be removable or portable so that they may be used on different computers, for example, to permit the transfer of data from one computer to another computer.

10

The second type of device is surface based data storage devices in which data is stored, typically, on the surface of a disk or tape. Examples of surface storage devices are magnetic disks and CD ROMs. Such data storage devices require a mechanical drive mechanism to be installed in or coupled to the computer to permit the data on the storage device to be read by the computer. In addition, such memory devices are limited by the surface area of the storage device, and the combination of the storage device and the drive mechanism for reading data from the storage device is generally bulky and/or delicate due to the moving parts that are required within the drive mechanism and/or storage device.

15

20

In accordance with the present invention, there is provided a portable data storage device comprising a coupling device for coupling to a computer serial

25

bus, an interface device coupled to the coupling device, a memory control device and a non-volatile solid-state memory device; the memory control device being coupled between the interface device and the memory device to control the flow of data from the memory device to the coupling device.

5

An advantage of the invention is that by providing a portable data storage device comprising a coupling device with an interface device, memory control device and a non-volatile solid-state memory device, it is possible to provide a portable data storage device which may be coupled to a computer having a  
10 serial bus port and which does not include moving parts or require a mechanical drive mechanism to read the data from the data storage device.

Preferably, the non-volatile solid-state memory device may be a read/write memory device, such as a flash memory device.

15

Preferably, where the memory device is a read/write memory device, the memory control device controls the flow of data to and from the memory device.

Typically, the data storage device further comprises a manually operated switch  
20 movable between a first position in which writing of data to the memory device is enabled, and a second position in which writing of data to the memory device is prevented.

Preferably, the memory control device may include a read only memory which stores a program to control the operation of the memory control device.

Preferably, the memory control device is a micro-controller.

- 5 Typically, the interface device comprises a universal serial bus (USB) driver to convert data between a USB format and a PC format, and the coupling device comprises a USB coupling device.

- Alternatively, the interface device comprises a driver for IEEE 1394 (Firewire)  
10 protocol, and the coupling device comprises a Firewire coupling device.

An example of a data storage device in accordance with the invention will now be described to the accompanying drawings, in which:

- 15 Figure 1 is a schematic block diagram of a portable data storage device;  
Figure 2 is a flow diagram showing the initial setup of the data storage device by a software supplier;  
Figure 3 is a flow diagram showing the initial setup of the data storage device by an end user; and  
20 Figure 4 is a flow diagram showing operation of the data storage device.

Figure 1 shows a data storage device 10 which includes a USB plug 1 which is coupled to a USB interface device 2. The USB interface device 2 is coupled to a micro-controller 3 which is coupled to a flash memory 4. The micro-controller

3 includes a read only memory (ROM) 5 which stores a program to control the operation of the micro-controller 3.

The operations performed by the micro-controller 3 include comparing  
5 passwords entered by a user with a corresponding password stored in the flash memory 4 to determine whether the user is authorised to access the contents of the flash memory 4. The program stored in the ROM 5 also controls the data flow to and from the flash memory 4 and can also detect whether the computer to which the memory device 1 is coupled has installed software programs which  
10 correspond to passwords stored in the flash memory 4. The micro-controller 3 can automatically retrieve passwords from the installed software to compare with passwords stored in the flash memory to verify that a user of the computer is authorised to access and run the software. In addition, the program stored in the ROM 5 also permits the setting of a password in the flash memory by a  
15 software supplier to correspond to the password contained in software supplied to a user. Typically, the password may correspond to the serial number of the software.

The flash memory 4 is typically divided into a number of different sections or  
20 zones. Typically, the flash memory is divided into two zones and each zone has a unique password. If the data storage device 10 is supplied with packaged software, the software serial number can be set in one zone to be the password to permit a user to access and use the software. The other zone, which can be used typically for storing a user's data, may have a separate password which is  
25 set by the user. Typically, the passwords are stored in a secure location of the

flash memory in an encrypted form. The encryption, decryption, data flow control and USB protocol are all managed by the micro-controller 3.

The micro-controller 3 also includes a random access memory (RAM) 6 which is  
5 a temporary storage area to permit functioning of the micro-controller 3. In addition, a manual switch 7 is coupled between the flash memory 4 and the micro-controller 3. The manual switch 7 is movable between a first position in which a user may write data to the flash memory 4 and a second position in which data is prevented from being written to the flash memory 4.

10

The device 10 also includes a USB socket 8 that is coupled directly to the USB plug 1 and permits other USB devices to be coupled to the USB via the device 10. For example, if a user wishes to increase memory space, a USB plug 1 of a second memory device 10 may be connected to the USB socket 8.

15

Figure 2 is a flow diagram showing the set up procedure for the device 10 for a software supplier when the software supplier intends to supply the device as an authentication device for the software. Firstly, the plug 1 of the device 10 is plugged into 20 to a USB socket on a computer. After the device 10 has been plugged into the USB socket on the computer, a communication is established 21 between the computer and the device 10. The software supplier has pre-installed installation software on the computer which is run by the operator.

20

From the pre-installed software, the operator selects password set up installation 22, in response to which the pre-installed software requests the  
25 operator to enter a password or serial number corresponding to the software

with which the device 10 is to be supplied. The password or serial number is then encrypted 26 and stored 27 in the flash memory 4.

Figure 3 is a flow diagram showing the initial set-up of a password for zone 2 of the flash memory 4 by an end user. The device 10 is typically supplied with driver software that is loaded by the user onto the computer prior to set-up of the device. To set-up the password for zone 2 the user plugs in 20 the device 10 into a USB port on the computer and communication 21 is established between the computer and the device 10. The user then runs the driver software and the driver software enters a password installation set-up mode 23 for zone 2. The user then enters 28 a password that they wish to use to prevent unauthorised access to zone 2 of the flash memory 4. The password entered is then encrypted 29 and stored 30 in the flash memory 4.

After an end user has performed the initial password set up procedure described above and shown in Figure 3, when a user plugs in 20 the device 10 to a USB port on a computer, the computer will establish a communication 21 with the device 10 and firstly, checks 33 an installation status flag stored in the flash memory 4 (see Figure 4). If the status flag is "Y", the device 10 outputs 34 an "OK" flag to the computer. The micro-controller 3 then instructs the computer to issue a request 35 to the user to select the zone they wish to enter. If the status flag is "N", the device does not output an "OK" flag to the computer, and goes straight to step 35. In response to the request 35 for zone selection, the user selects 36 either zone 1 or zone 2.



If zone 1 is selected, the device 10 assumes that the user wishes to install software on the computer which is stored in the flash memory 4 and requests 37 the appropriate password for confirmation that the user is authorised to install the software. The micro-controller 3 receives the password entered by the user, retrieves the zone 1 password stored in the flash memory 4, decrypts the zone 1 password and compares it with the password entered by the user to authenticate 38 whether the user is authorised to install the software. If the passwords do not match, the device 10 prompts the computer to request 37 the user to enter the password again.

10

If the password entered by the user matches the password stored in the flash memory 4, the micro-controller 3 starts 39 the software installation from the flash memory 4 to the computer. In order to install software, the computer sends 40 a read/write command in USB format to the micro-controller 3 for data, the micro-controller 3 retrieves the requested data from the flash memory 4 and sends 41 the data to the driver 2. The driver 2 converts 42 the data to PC format and outputs the data to the computer through the USB plug 1. The micro-controller 3 then checks 43 whether the software installation is complete. If the operation is not complete, the operation returns to step 40. If the installation of the software is complete, the status flag stored in the flash memory 4 is changed to "Y" and the device 10 may then be removed 45 from the USB socket on the computer.

If a user selects zone 2, the micro-controller 3 sends a command to the computer to request 46 the user to enter the password for zone 2. When the

user enters the password, the computer sends the password to the micro-controller 3. The micro-controller 3 retrieves the password for zone 2 from the flash memory 4, decrypts 47 the password and compares it with the password entered by the user. If the password entered by the user is incorrect, the  
5 operation returns to step 46 and the computer requests 46 the user for the password again.

If the password entered by the user is correct, the user has access to zone 2 of the flash memory 4 to read data from the flash memory 4 and to write data to  
10 the flash memory 4. However, data can only be written to the flash memory 4 if the manual switch 7 is in the position to permit data to be written to the flash memory 4. In order to read or write data from or to the flash memory 4 a read or write command is sent 48 by the computer in USB format to the micro-controller 3. In response to the read or write command the micro-controller 3  
15 either retrieves 49 data from the flash memory 4 and sends it to the driver 2 for conversion 50 to PC format and then to be output to the computer or receives data from the driver to write it to the flash memory 4.

The micro-controller 3 then determines 51 whether the read or write operation is  
20 complete. If the operation is not complete it returns to step 48. If the operation is complete the operation terminates 52.

The device 10 described above is for coupling to a universal serial bus (USB). However, the plug 1, the interface device 2 and socket 8 could be for use with  
25 any appropriate computer serial bus. For example, the device 10 could be

modified for use with IEEE 1394 (Firewire) protocol by substituting the USB plug 1, USB interface device 2 and socket 8 with a Firewire protocol compatible plug, interface device and socket respectively.

- 5 An advantage of the device 10 described above is that it provides a portable data storage device for a computer which does not require a mechanical operated reading/writing device. In addition, the device 10 has no moving parts. This enables to data storage device 10 to be more compact than conventional portable data storage devices.

**CLAIMS**

1. A portable data storage device comprising a coupling device for coupling to a computer serial bus, an interface device coupled to the coupling device, a memory control device and a non-volatile solid-state memory device; the  
5 memory control device being coupled between the interface device and the memory device to control the flow of data from the memory device to the coupling device.
2. A device according to claim 1, wherein the non-volatile solid-state  
10 memory device is a read/write memory device.
3. A device according to claim 2, wherein the read/write memory device is a flash memory device.
- 15 4. A device according to claim 2 or claim 3, wherein the memory control device controls the flow of data to and from the memory device.
5. A device according to any of claims 2 to 4, further comprising a manually operated switch movable between a first position in which writing of data to the  
20 memory device is enabled, and a second position in which writing of data to the memory device is prevented.
6. A device according to any of the preceding claims, wherein the memory control device comprises a micro-controller.

7. A device according to any of the preceding claims, wherein the coupling device comprises a universal serial bus coupling device and the interface device comprises a USB driver.

- 5 8. A device according to any of the preceding claims, wherein the coupling device comprises an IEEE 1394 (Firewire) protocol coupling device and the interface device is a Firewire protocol driver.

1/3

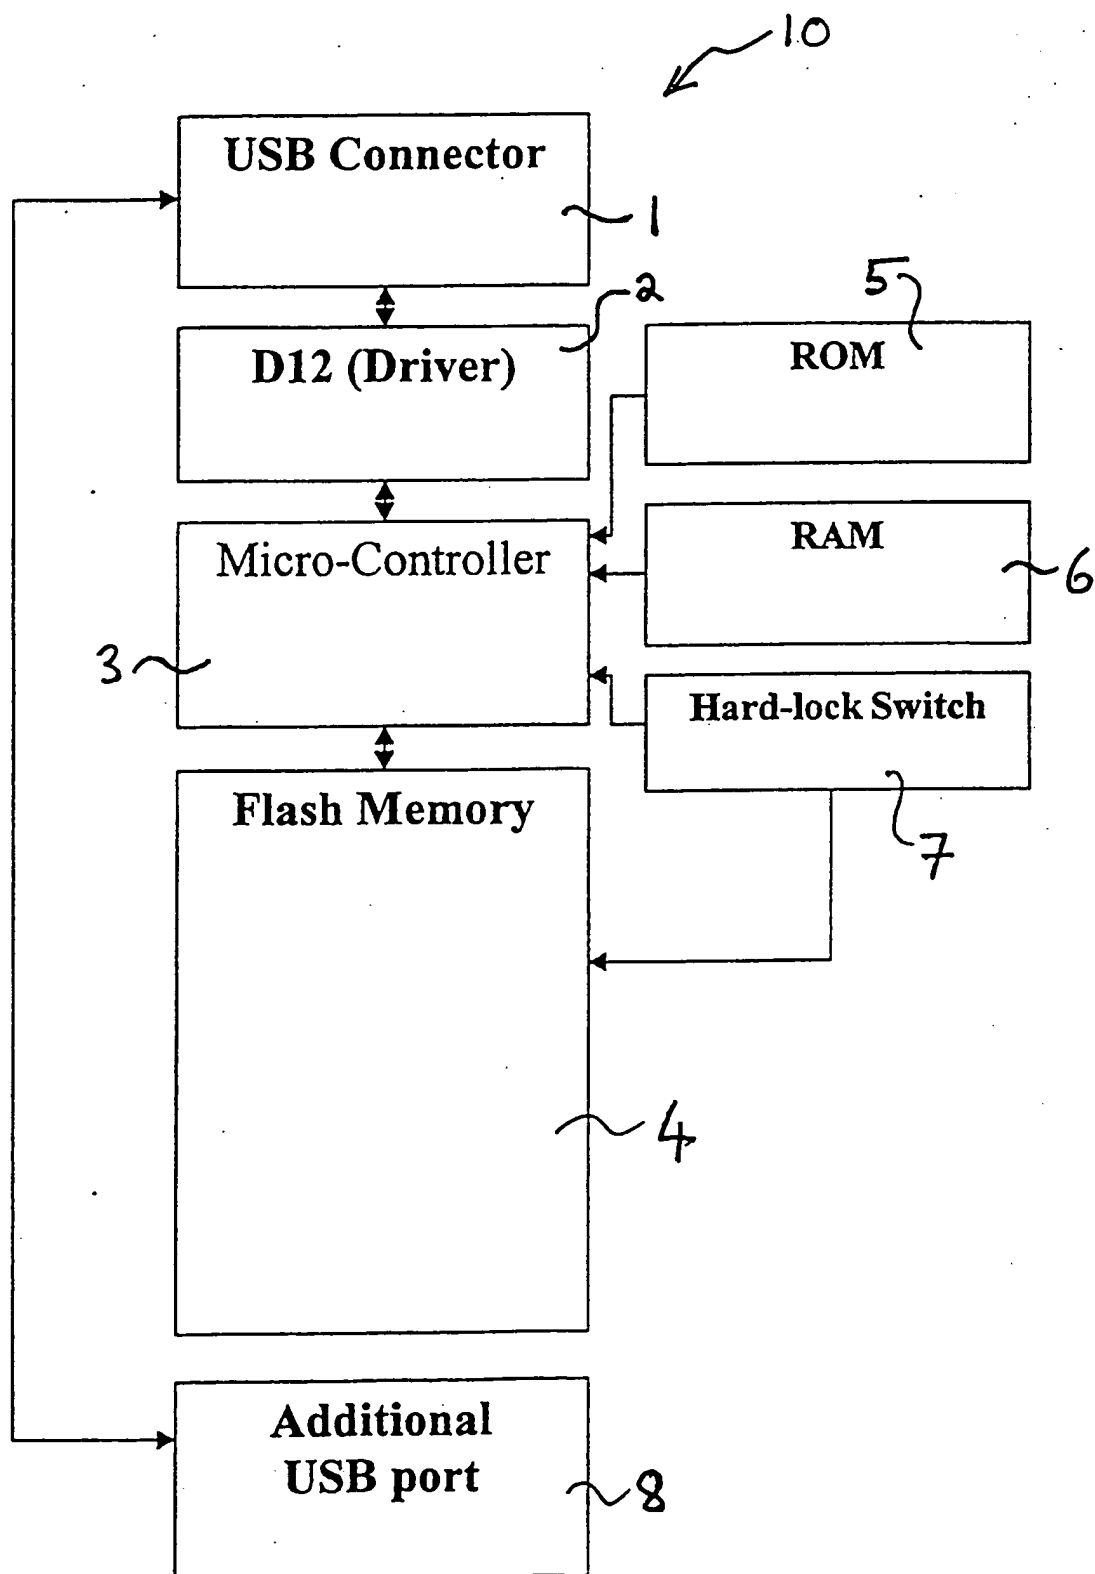


Figure 1

2 / 3

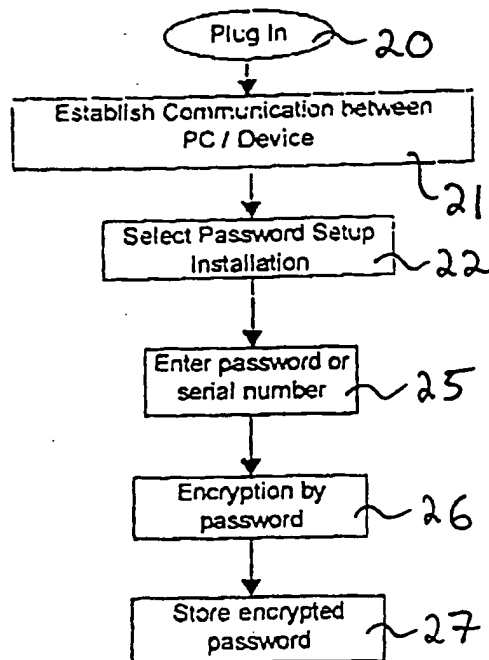


Figure 2

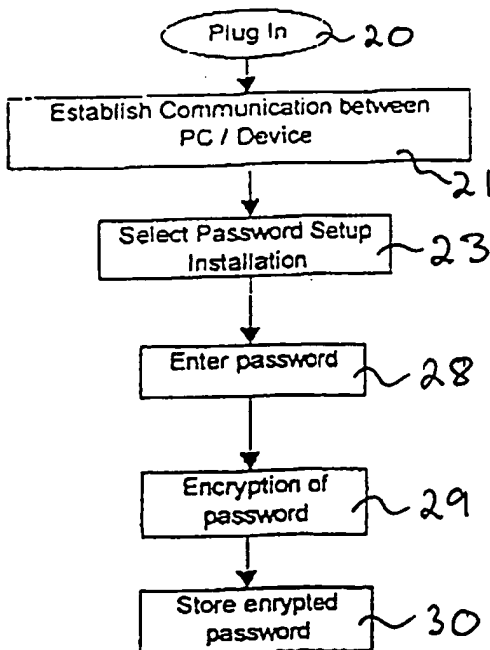


Figure 3

3/3

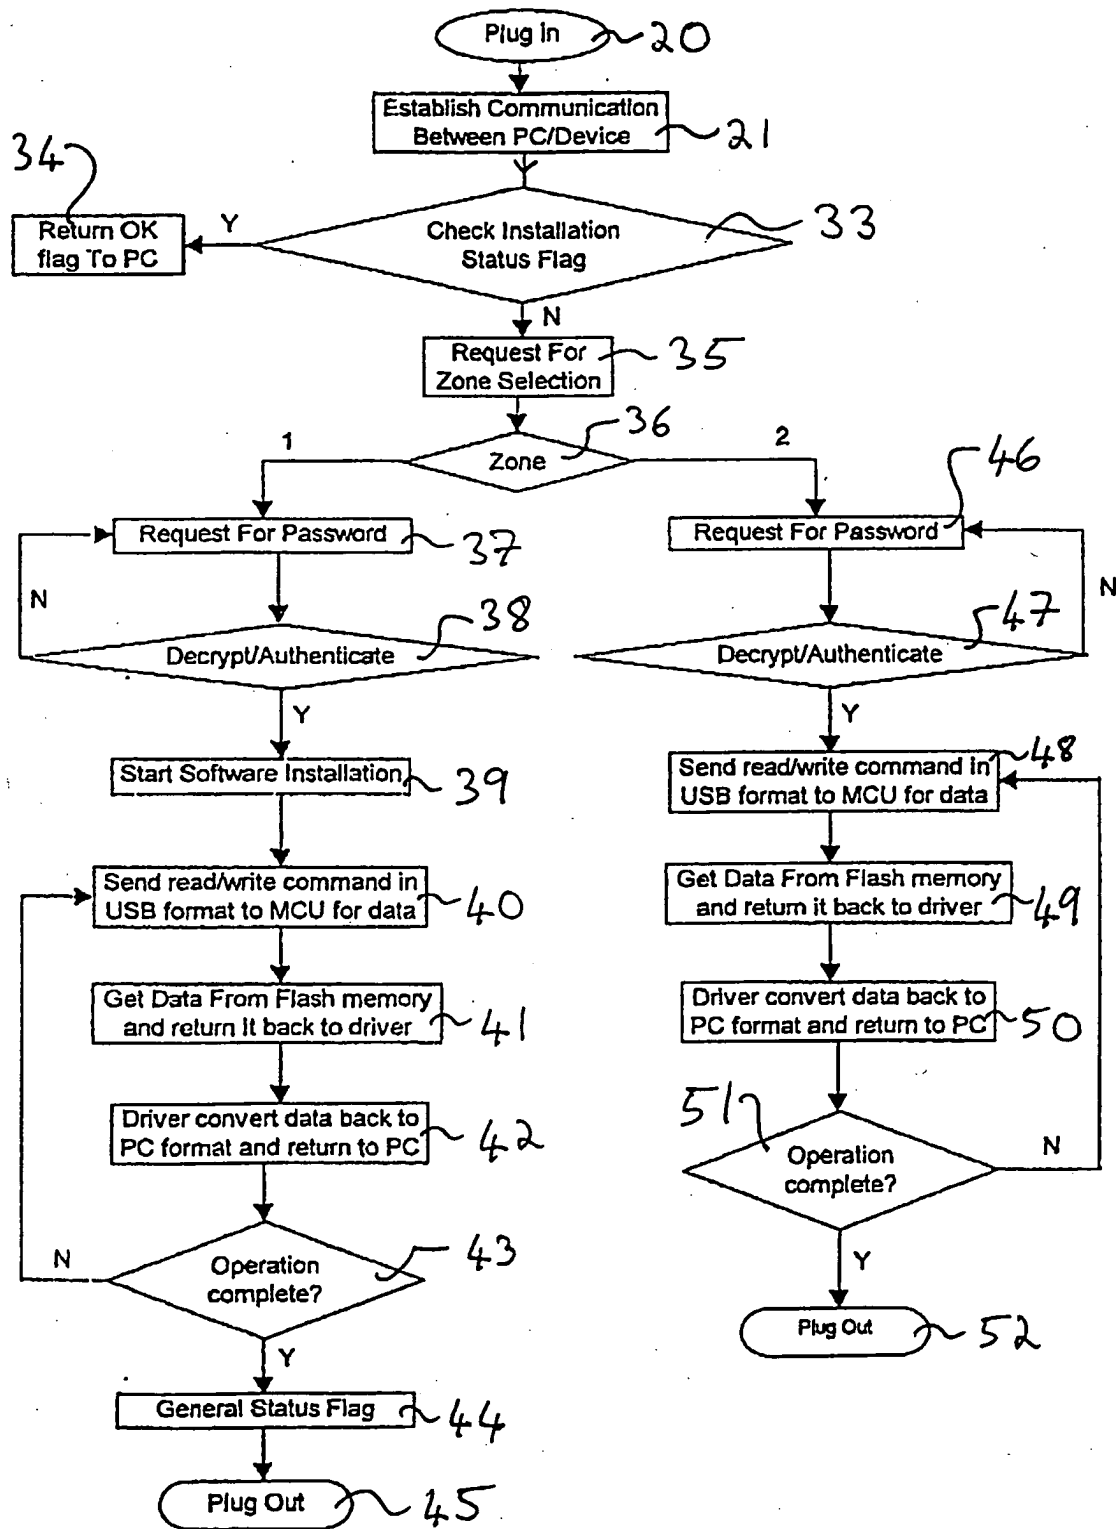


Figure 4



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SG 00/00029

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: G11B 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: G11B 11/00, 02,05

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

G06F 3/00, 12/00, 12/06

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6016530 A (AUCLAIR et al.) 18 January 2000 (18.01.00)	1
P,A	US 6058441 A (SHU) 2 May 2000 (02.05.00)	1
A	US 5760986 A (MOREHOUSE et al.) 2 June 1998 (02.06.98)	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## • Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&amp;“ document member of the same patent family

Date of the actual completion of the international search

24 March 2001 (24.03.2001)

Date of mailing of the international search report

12 April 2001 (12.04.2001)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

GRÖSSING

Telephone No. 1/53424/386

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG 00/00029

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
US	A	5760986	06-06-1998	EP	A1	614564	14-09-1994
				EP	A4	614564	19-07-1995
				US	A	5379171	03-01-1995
				WO	A1	9306594	01-04-1993
				US	A	5835303	10-11-1998
				US	A	5579189	26-11-1996
				US	A	5592349	07-01-1997
				US	A	5694267	02-12-1997
				US	A	5867340	02-02-1999
				US	A	5778418	07-07-1998
US	A	6016530	18-01-2000				
US	A	6058441	02-05-2000	none			

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**